

ADVANTAGE AIR®

PLASTIC DIFFUSERS & GRILLES

LINEAR ELITE DIFFUSER



Clips supplied separately. Please specify.

FEATURES

- Two 25mm slots provide high flow rates with low noise levels.
- One piece construction of the diffuser eliminates unsightly joins.
- Attractive molded diffuser is scratch resistant and will not corrode or deteriorate with age.
- Fast, easy installation.
- Two deflectors per slot enables 180 degree throw pattern.
- Significantly lower cost than aluminum diffusers.
- Will fit both metric and imperial commercial ceiling grids.


CONSTRUCTION

- The diffuser is constructed from white ABS plastic.
- The boot, adaptor and deflectors are all constructed from black plastic.
- The internal insulation for the boot is molded polystyrene.
- The boot is supplied with a side central hole for the propriety spigot.

APPLICATIONS

- Reverse cycle commercial air conditioning.
- Heating.
- Suggested cut out 118mm x 1175mm.

DIMENSIONS

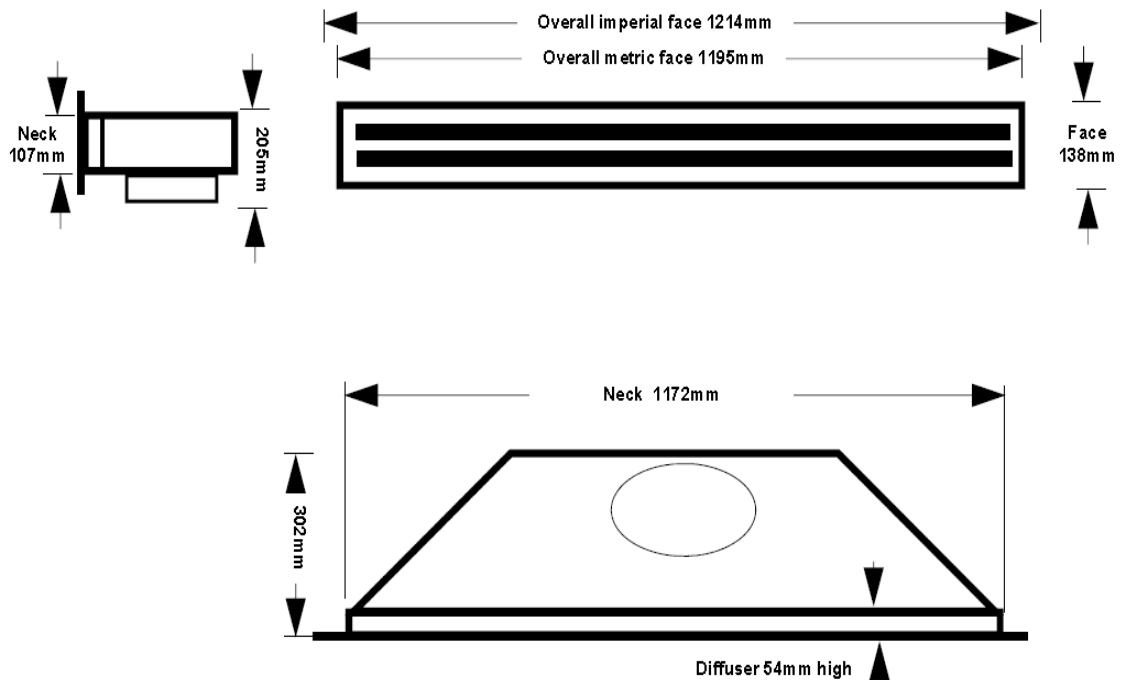


PLASTIC DIFFUSERS & GRILLES

LINEAR ELITE DIFFUSER PERFORMANCE CHARACTERISTICS


LINEAR

(1200x100 Linear Elite Diffuser - Horizontal discharge)

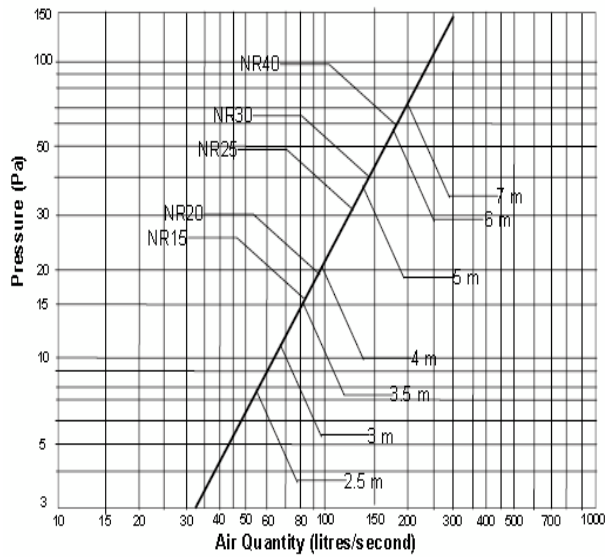


LINEAR

(1200x100 Linear Elite Diffuser - Vertical discharge)

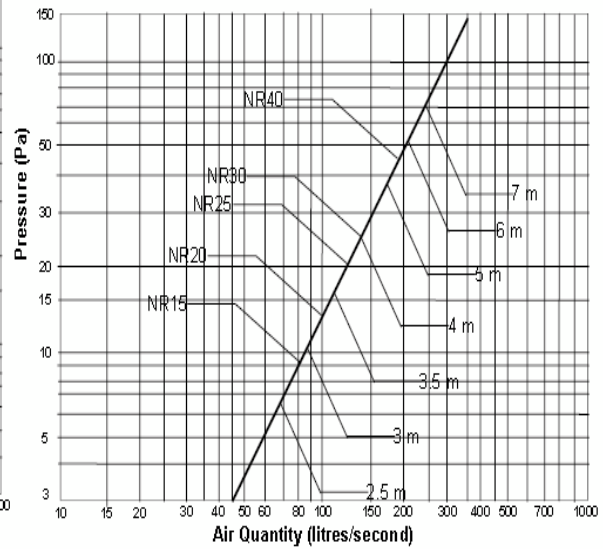

LINEAR (1200x100 Linear Elite Diffuser - Return air)

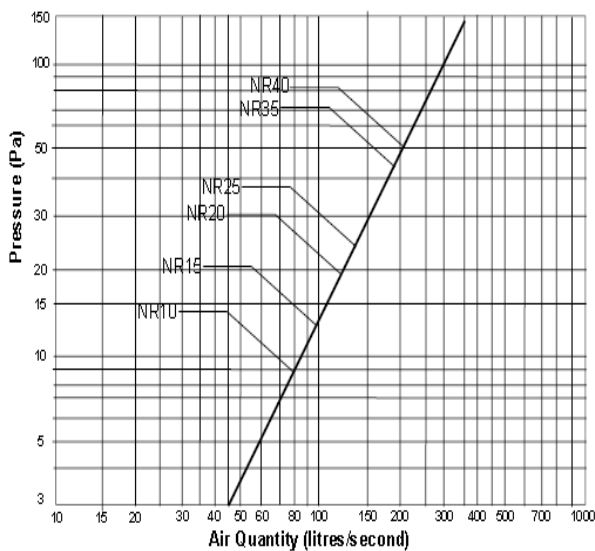

LEGEND

NR - Noise Rating